Signet 2850 Conductivity/Resistivity Sensor Electronics and Integral Systems with PVDF Sensor





Universal Mount Junction Box





NPT Mount Junction Box

2850 Integral Conductivity System for in-line installations, PVDF

The Signet 2850 Conductivity/Resistivity Sensor Electronics are available in various configurations for maximum installation flexibility. The universal mount version is for pipe, wall, or tank mounting and enables single or dual (digital versions only) inputs using any standard Signet conductivity/resistivity sensor. The threaded j-box version can be used with these same Signet sensors for submersible sensor mounting. It is also available as a combined integral system configuration for in-line mounting and includes a conductivity electrode in a choice of 0.01, 0.1, 1.0, 10.0 or 20.0 cm⁻¹ cell constants. The 2850 is ideal for applications with a conductivity range of 0.055 to 400,000 μ S or a resistivity range of 18.2 M Ω to 10 k Ω .

All 2850 units are available with a digital $(S^{3}L)$ output, or a single 4 to 20 mA. The digital $(S^{3}L)$ output version can be paired with the 9900 or 9950 Transmitter to extend the distance between the measuring points to 120 m (400 ft).

The 8900 Multi-Parameter Controller allows for up to six 2850 (S³L) output conductivity sensors to be used with the Signet 8900 Multi-Parameter Controller. All 2850 units are built with NEMA 4X/IP65 enclosures which allow output wiring connections with long cable runs of up to 305 m (1,000 ft).

The two-wire 4 to 20 mA output version is available with eight 4 to 20 mA output ranges for each electrode cell constant. Each range can be inverted and is field selectable.

EasyCal is a standard feature that automatically recognizes conductivity test solution values for simple field calibration. A certification tool is available for validation of the sensor electronics according to USP requirements.

Features

- Test certificate supplied with all sensors
- Custom cell constant programmed into the electronics
- Integral mount systems for quick and easy installation
- Compact design for maximum installation flexibility
- Extends the distance between the measuring point and the 9900 Transmitter to 120 m (400 ft)
- Digital (S³L) interface or two-wire 4 to 20 mA output
- EasyCal with automatic test solution recognition
- For use with ALL Signet conductivity electrodes



Applications

- Water Treatment & Water Quality Monitoring
- Reverse Osmosis
- Deionization
- Demineralizer, Regeneration & Rinse
- Scrubber, Cooling Tower and Boiler Protection
- Aquatic Animal Life Support Systems

Specifications


General						
Compatible Electrodes		All Signe	All Signet Sensors			
Materials						
NPT Mount Junction Box for Integral Mount			PBT			
Universal/Remote Mount		PBT, CP				
EasyCal - Automatic Recognition						
			(@25 °C) (Test solutions Per ASTM D1125-95)			
		μS, 500 μS, 1000 μS, 5000 μS, 10,000 μS, 50,000 μS, 100,000 μS				
	(@ 25 °C) (Standard	test solutior	IS)			
Electrical						
Power	12 to 24 VDC ±10%, regulated for 4 to 20 mA output (typically called "Loop Powered")					
		5 to 6.5 VDC \pm 5% regulated recommended (provided by the Signet 8900, 9900, 0486),				
	3.0 mA max for Digital (S ³ L) output (Reverse polarity and short circuit protected)					
Digital (S ³ L) Output: Serial ASCI						
Accuracy	Conductivity	± 2% of reading				
	Temperature	< 0.2 °C				
Resolution	Conductivity	0.1% of reading				
	Temperature	< 0.2 °C				
Update Rate	Conductivity and	< 600 m	5			
	Temperature					
Available Data via Digital (S³L) C	•					
	Raw conductivity					
	Calibrated conductiv					
		erature-compensated conductivity				
	Temperature					
Max. Temperature/Pressure Ra	ating					
Operating Temperature	-10 °C to 85 ° C		14 °F to 185 °F			
Storage Temperature	-20 °C to 85 ° C	-4 °F to 185 °F				
Relative Humidity	0 to 95%, non-conde	nsing				
Enclosure	NEMA 4X/IP65					
Current Output						
Field-selectable ranges						
Factory Set Span	0.01 cell (2839**)	4 to 20 n	nA = 0 to 100 μS			
(Integral mount only)	0.10 cell (2840**)	$4 \text{ to } 20 \text{ mA} = 0 \text{ to } 1000 \mu\text{S}$				
5 ,	1.0 cell (2841**)		$hA = 0$ to 10,000 μ S			
	10.0 cell (2842**)		$hA = 0$ to 200,000 μ S			
	20.0 cell (2823)*		$hA = 0$ to 200,000 μ S			
*Special Order	20.0 0011 (2020)	4 10 20 1	π = 0 το 400,000 μο			
	all sensors. Custom cell c	onstant pro	grammed into the electronics			
Max. Loop Resistance	50 Ω @ 12 VDC	sensors. Custom cell constant programmed into the electronics.				
	325 Ω @ 18 VDC					
	600 Ω @ 24 VDC					
Accuracy	± 2% of output span					
Resolution						
Update Rate	7 μA < 600 ms					
Error Indication	< 800 ms 22 mA					
		coll and re-	w conductivity value < 0.5 v.C. the 2050 suite switches to			
Pure Water Compensation	When using 0.01-cm cell and raw conductivity value < $0.5 \ \mu$ S, the 2850 auto-switches to compensate for non-linear temperature effects found in this low conductivity					
		(high resistivity) range.				
Shipping Weight	(ingli resistivity) fally					
Surveying mergin	NPT Mount	0.75 kg	1.75 lb			
	Junction Box	0.73 kg				
	Universal Mount	0.75 kg	1.75 lb			
Standards and Approvals		0.7 J KY	1.75 (0			
Manadi us and Appl Mats	CE, FCC					
		RoHS compliant, China RoHS				
	Manufactured under	ISO 9001 fo	r Quality and ISO 14001 for Environmental			
			for Occupational Health and Safety			

Dimensions


2850-5X NPT Mount **Junction Box Systems**



2850-6X **Universal Mount Systems**




2850-5X-XX-1V(D) Field (Integral) Mount Systems



Sensor	Insertion Depth	
X1 (3-2839-1V(D))	73 mm (2.88 in.)	
X2 (3-2840-1V(D))	35 mm (1.38 in.)	
X3 (3-2841-1V(D))	41.3 mm (1.63 in.)	
X4 (3-2842-1V(D))	41.3 mm (1.63 in.)	


In-Line Installation

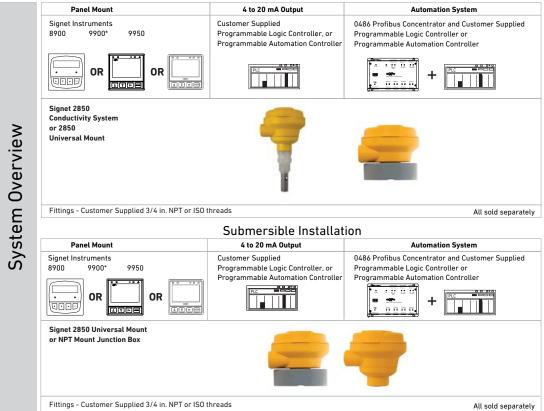

* If the 2850 is used with the 9900, it is not necessary to use the 9900 conductivity module.

Note:

The 9900 (with Direct Conductivity/Resistivity module) can run all conductivity sensors with 30 m (100 ft) of cable. The 2850 (S³L) signal can be used for distances over 30 m (100 ft). The 2850 has a limited sensor cable input length of 4.6 m (15 ft).

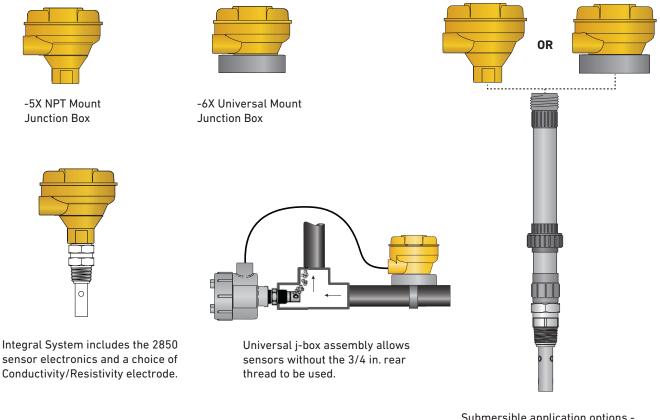

Submersible application options -Please see Signet Submersion Kit brochure, 3-0000.707, for more information.

Field Selectable Ranges for 4 to 20 mA Operation


The chart below indicates the field selectable ranges in which the 2850 sensor electronics can be set via internal switches. All ranges can be inverted if required. Signet Models listed below are compatible Conductivity/Resistivity electrodes.

0.01 Cell	0.10 Cell	1.0 cell	10.0 Cell	20.0 Cell
Signet Model 2839	Signet Model 2840	Signet Model 2841	Signet Model 2842	Signet Model 2823 (Special Order)
10 to 20 MΩ	0 to 2 µS	0 to 20 µS	0 to 200 μS	0 to 400 μS
2 to 10 MΩ	0 to 5 μS	0 to 50 µS	0 to 500 μS	0 to 1,000 μS
0 to 2 MΩ	0 to 10 µS	0 to 100 µS	0 to 1,000 µS	0 to 2,000 μS
0 to 1 MΩ	0 to 50 µS	0 to 500 μS	0 to 5,000 µS	0 to 10,000 μS
0 to 5 MΩ	0 to 100 µS	0 to 1000 µS	0 to 10,000 μS	0 to 20,000 μS
0 to 10 MΩ	0 to 200 µS	0 to 2000 µS	0 to 50,000 μS	0 to 100,000 μS
N/A	0 to 500 µS	0 to 5,000 µS	0 to 100,000 μS	0 to 200,000 μS
N/A	0 to 1,000 µS	0 to 10,000 μS	0 to 200,000 μS	0 to 400,000 μS

The 4 to 20 mA output ranges shown in this chart can be inverted using the internal switch Resistivity. Ranges are in BOLD Note: The 2819-2823 series Integral Systems must be ordered through special order products.

Operating Range Chart


The 2850 is capable of measuring conductivity and resistivity values over a wide range. Below is a chart of Signet Conductivity/Resistivity electrodes (listed in each range box) that is recommended for the specified measurement range.

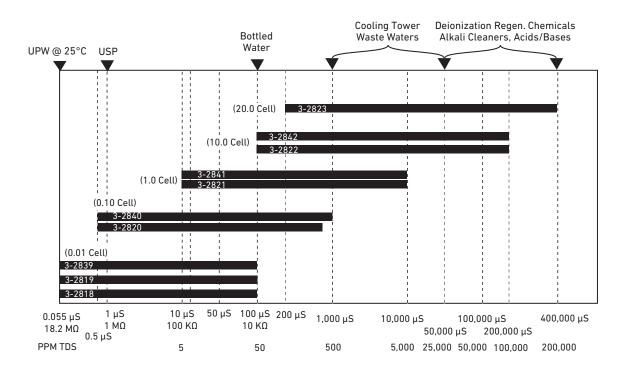

Ordering Notes

- 1) All 2850 units can be used with any Signet Conductivity/Resistivity electrode
- Integral systems are only offered with Signet models 2839-2842 electrodes. 2818-2823 require a special order sensor.
- Dual channel units are only available in the universal mount junction box/remote mount configuration and with digital (S³L) output for use with the Multi-Parameter instruments.

Ordering Information

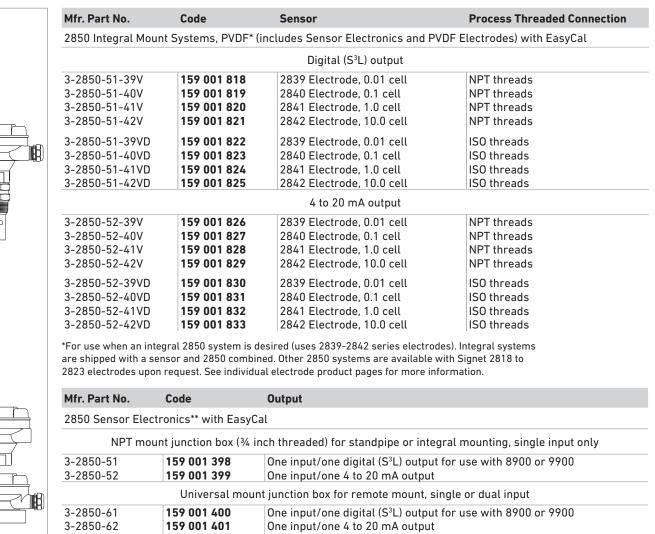

3-2850-63 **159 001 402** Dual input, dual (S³L) output for use with 8900 only

**For use when remote sensor mounting is desired. Compatible with ALL Signet conductivity electrodes. See individual electrode product pages for more information.

Accessories and Replacement Parts

Mfr. Part No.	Code	Description
3-2850.101-1	159 001 392	Plug-in NIST traceable recertification tool, 1.0 μ S simulated
3-2850.101-2	159 001 393	Plug-in NIST traceable recertification tool, 2.5 μ S simulated
3-2850.101-3	159 001 394	Plug-in NIST traceable recertification tool, 10.0 μ S simulated
3-2850.101-4	159 001 395	Plug-in NIST traceable recertification tool, 18.2 M Ω simulated
3-2850.101-5	159 001 396	Plug-in NIST traceable recertification tool, 10.0 $M\Omega$ simulated
3-2839-1V	159 001 810	Electrode PVDF/SS- 0.01 µS/cm, ¾ inch NPT, 4.6 m (15 ft) cable
3-2839-1VD	159 001 811	Electrode PVDF/SS- 0.01 µS/cm, ISO 7/1-R 3/4, 4.6 m (15 ft) cable
3-2840-1V	159 001 812	Electrode PVDF/SS- 0.1 µS/cm, ¾ inch NPT, 4.6 m (15 ft) cable
3-2840-1VD	159 001 813	Electrode PVDF/SS- 0.1 µS/cm, ISO 7/1-R 3/4, 4.6 m (15 ft) cable
3-2841-1V	159 001 814	Electrode PVDF/SS- 1.0 μ S/cm, 3 4 inch NPT, 4.6 m (15 ft) cable
3-2841-1VD	159 001 815	Electrode PVDF/SS- 1.0 µS/cm, ISO 7/1-R 3/4, 4.6 m (15 ft) cable
3-2842-1V	159 001 816	Electrode PVDF/SS- 10.0 μ S/cm, 34 inch NPT, 4.6 m (15 ft) cable
3-2842-1VD	159 001 817	Electrode PVDF/SS- 10.0 µS/cm, ISO 7/1-R 3/4, 4.6 m (15 ft) cable
5523-0322	159 001 807	Sensor cable (per ft), 3 cond. plus shield, 22 AWG

Note: Although a customer can extend the cable of a conductivity sensor, GF Signet does not recommend this, and offers extended cable lengths from the factory.

3-2850_PVDF.099 Rev C (03/18) © Georg Fischer Signet LLC

3401 Aero Jet Avenue, El Monte, CA 91731-2882 U.S.A. • Tel. (626) 571-2770 • Fax (626) 573-2057 • www.gfsignet.com • e-mail: signet.ps@georgfischer.com Specifications subject to change without notice. All rights reserved. All corporate names and trademarks stated herein are the property of their respective companies.